


# BOARD-UP SPECIFICATIONS FOR PROPERTY OWNER

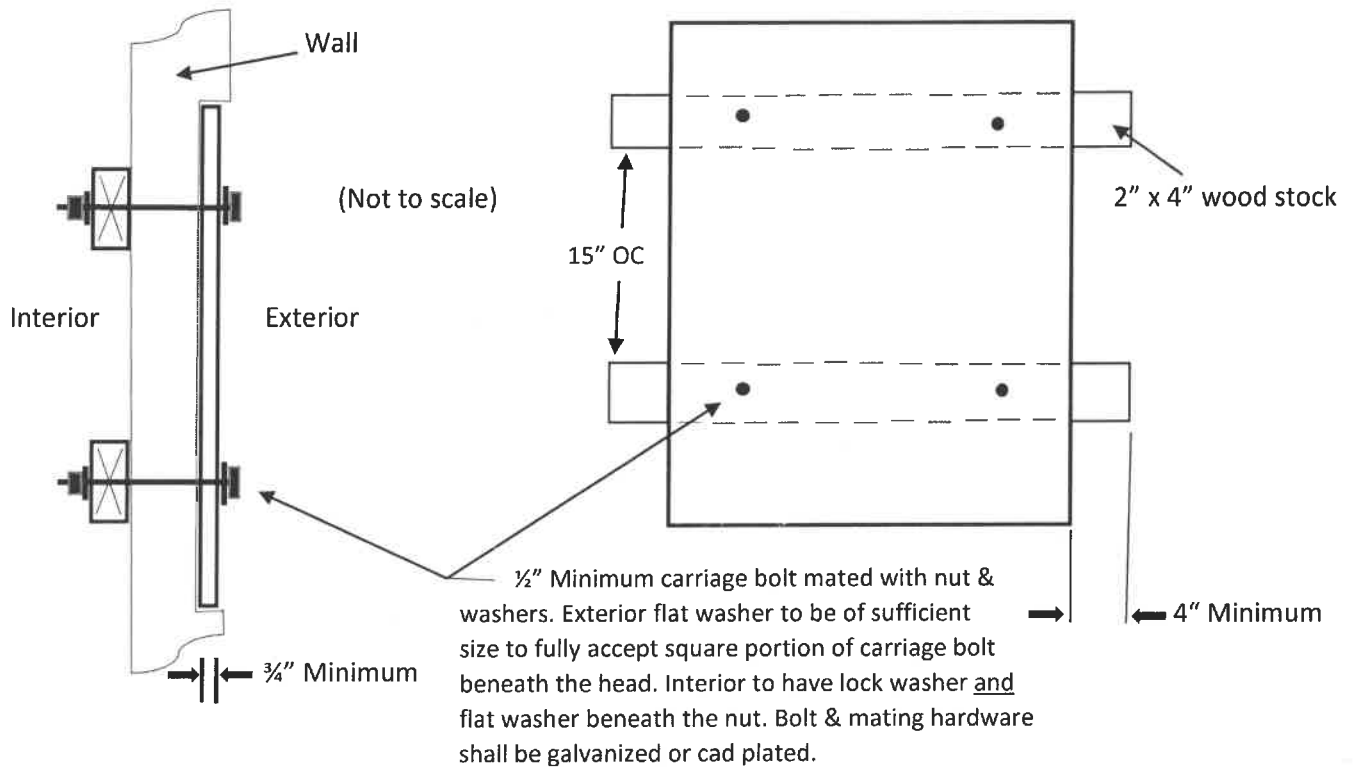

1. All exterior door openings, except the front door and garage door, are to be secured in accordance with the above specifications.
2. Front door is to be secured with plywood over door, complete with two (2) equally spaced Holmes Heavy Duty Security Bolts (padlock cut-proof) or equal and with padlocks.
3. Garage door openings when garage door is attached shall be secured with two (2) Holmes Heavy Duty Security Slide Bolts (padlock cut-proof) or equal and with padlocks, one on each side of the door.
4. All padlocks on all premises shall be keyed alike and keys shall be provided to the Department.
5. All plates, bolts, washers, and nuts used for board-up shall be galvanized or cad plated.
6. Board-up of unusual sized doors, windows, and garage openings (when garage door is not attached) or other openings shall be installed as per instruction of the designated Inspector.
7. All window openings shall be secured as per the above specifications.
  - a. Boards shall be fitted to the screen molding stop.
  - b. Boards shall be solid sheets without seams or joints.
  - c. Boards shall be 3/4" exterior grade plywood.
8. Signage shall be posted as follows:
  - a. 12" x 24" minimum
  - b. Incombustible material.
  - c. Minimum of four (4) holes, the maximum dimension of 1/4", punch or drilled no closer than 3/8" from edge/corner of sign.
  - d. Attachment: Securely fasten in a conspicuous location on the building.
  - e. Inscription: See right. Character size to be 2 1/2" minimum and 4" maximum in height. Character color to be black or red set on a white background.

**THIS PROPERTY CLOSED  
TO THE PUBLIC  
No Entry Without Permission  
L.A.M.C. SEC. 41.24**